
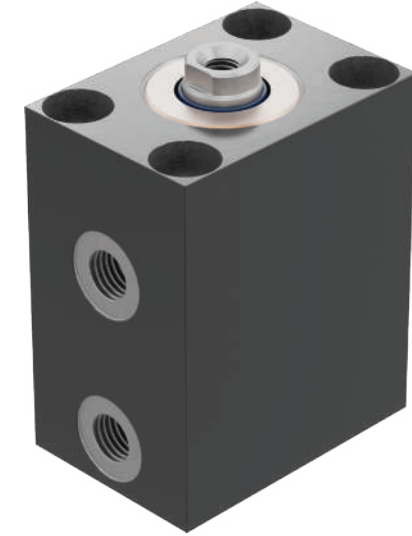


M8

Blok Silindir / Block Cylinder

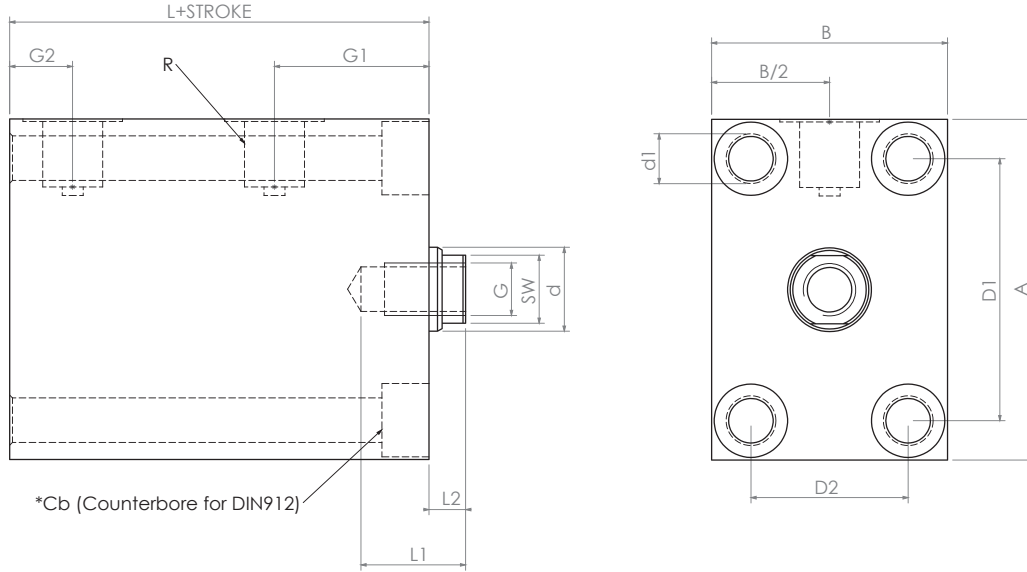

Piston Çapı / Bore : Ø25 – Ø100

Mak. Çalışma Basıncı / Max. Working Pressure : 0 – 500 Bar

Sızdırmazlık / Sealing : Nbr – Pu – Viton

Stroke (Opsiyon Mevcut / Option Available) : 10mm – 200 mm

	Ø Piston	Ø Mil	A	B	d	d1	D1	D2	G	G1	G2	L	L1	L2	R	SW
	Ø Bore	Ø Rod														
M8	25	16	65	45	16	8,5	50	30	M10x1,5	29,5	12	70	20	7	G1/4"	13
	32	20	75	55	20	10,5	55	35	M12x1,5	34,5	12	75	25	10	G1/4"	16
	40	25	85	63	25	10,5	63	40	M12x1,5	34,5	12	85	25	10	G1/4"	21
	50	28	100	75	28	13	76	45	M16x2	39,5	12	90	35	10	G1/4"	24
	63	36	125	95	36	17	95	65	M20x2,5	45,5	19,5	110	40	14	G3/8"	32
	80	45	160	120	45	21	120	80	M27x3	45,5	19,5	120	55	14	G1/2"	40
	100	56	200	150	56	25	158	108	M36x4	52	23	130	55	15	G1/2"	50